

# MARKETING ANNOUNCEMENT

Authorized Applicator



**MA-2020-21**

**Flexible FAST™ Splatter Application Update**

**November 11, 2020**

## To: Carlisle SynTec Systems' Authorized Applicators


Carlisle SynTec Systems is pleased to announce that Flexible FAST 50-gallon drums, 15-gallon drums, and 5-gallon jugs can now be used for splatter application. Splatter application is approved for both membrane and insulation attachment when Flexible FAST is applied using Carlisle-approved dispensing equipment.

Flexible FAST splatter application provides the following benefits:

- **Consistent application** – Removes the guesswork of ensuring the proper spacing of 4", 6", or 12" on-center beads while providing a consistent 50% coverage of the substrate.
- **Improved aesthetics** – Provides an even coat of adhesive on the substrate, eliminating the telegraphing that can occur with bead applications.



Bead Application

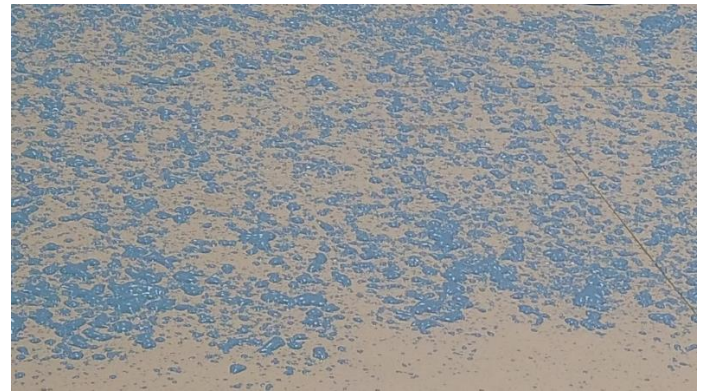

Splatter Application

- **Improved performance** – Provides exceptional uplift performance, achieving ratings up to an FM 1-915.
- **Speed of application** – Improves installation time by up to 30% when compared to 6" on-center bead applications.
- **Improved coverage rates** – Applied at ½ gallon per square, providing applicators with a cost-competitive application.
- **Approved for a variety of substrates** – Splatter application has been tested over a variety of substrates. For a list of approved substrates, please review the Flexible FAST PDS or the Flexible FAST Adhesive guide.
- **Wide range of equipment options** – Approved dispensing equipment for Flexible FAST splatter applications includes the Patriot Jr. or P55 with the VEE Air Gun, the HULK Rig with the HULK Air Gun, or Carlisle's Flexible FAST Dual Tanks.

<b>Flexible FAST Coverage Rates</b>					
<b>Package Type</b>	<b>Full Spray (ft<sup>2</sup>)</b>	<b>Splatter (ft<sup>2</sup>)</b>	<b>4" o.c. (ft<sup>2</sup>)</b>	<b>6" o.c. (ft<sup>2</sup>)</b>	<b>12" o.c. (ft<sup>2</sup>)</b>
<b>Dual Cartridge</b>	N/A	N/A	100-200	200-300	400-600
<b>Dual Tanks</b>	N/A	2,000-2,200*	1,000-1,200	1,500-1,700	3,000-3,200
<b>5-Gallon Jugs</b>	1,000	1,800-2,000	670-900	1,000-1,250	2,000-2,500
<b>15-Gallon Drums</b>	1,800-3,000	5,400-6,000	2,110-2,700	3,000-3,750	6,000-7,500
<b>50-Gallon Drums</b>	5,000-10,000	18,000-20,000	6,700-9,000	10,000-12,500	20,000-25,000

\*Dual Tank splatter approved for membrane attachment to smooth flat surfaces only.

For equipment requirements, application procedures, and a list of approved splatter application equipment, please reference the Flexible FAST Adhesive Equipment and Set-Up (G-02-20) section in the Carlisle Spec Supplement, or the Flexible FAST Adhesive guide.

Sincerely,



Austin Kulp  
FleeceBACK® Product Manager